


MEASUREMENT: SY (PATCHING)

PAYMENT: HMA (___") INCLUDES EXCAVATION TO SUBGRADE, TACK COAT, GEOTEXTILE, NEW HMA, AND COMPACTION.

MEASUREMENT: SY (FULL DEPTH RECONSTRUCTION)

PAYMENT: HMA (___") INCLUDES TACK COAT, NEW HMA AND COMPACTION.

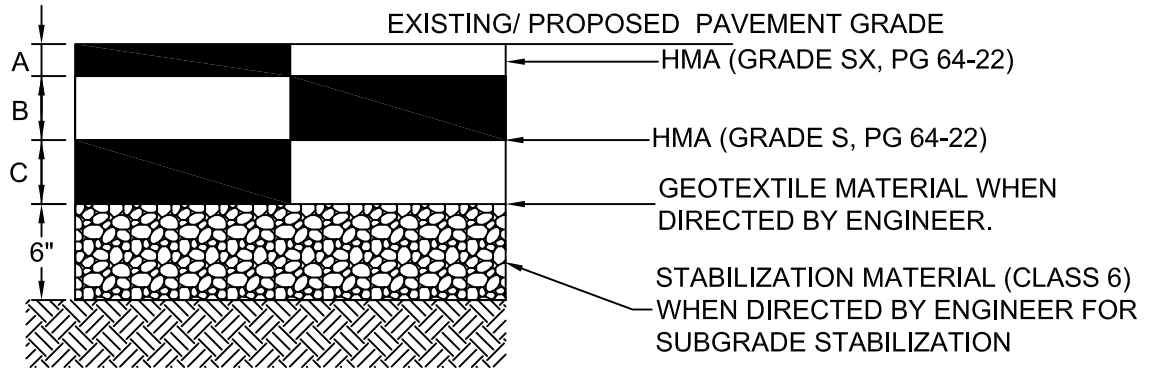

NOTE 1: IF PATCHING, AREA TO BE PATCHED SHALL BE SAWCUT TO THE FULL DEPTH OR CUT BY A METHOD APPROVED BY THE ENGINEER WHICH LEAVES A VERTICAL FACE ON THE EXISTING PAVEMENT AND NO DEFORMATION OF THE SURFACE AT THE CUT. APPLY TACK COAT TO CUT FACE.

NOTE 2: FOR FULL DEPTH RECONSTRUCTION, ASPHALT THICKNESS SHOWN AS FULL DEPTH. STABILIZATION MATERIAL MAY BE SUBSTITUTED FOR 1" OF ASPHALT AT THE DISCRETION OF THE ENGINEER.

NOTE 3: SUBGRADE COMPACTED TO MINIMUM DENSITY SOIL CLASSIFICATION, CDOT SECTION 203.07

NOTE 4: IF STREET IS TO BE MILLED, ASPHALT SHALL BE SOIL CLASSIFICATION, CDOT SECTION 203.07

HMA	A	B	C
6"	2"	4"	NA
9"	2"	3"	4"
4"	NA	4"	NA
8"	NA	4"	4"

TYPICAL ASPHALT DETAIL HOT MIX ASPHALT